


| | |
|-------------------|----------------|
| PUMP RANGE | EPSILON |
| MODEL | E18B |
| STATUS | CURRENT |



| | |
|----------------|-----------------|
| SECTION | 2 |
| PAGE | 08201 |
| DATE | Feb 2008 |

PERFORMANCE DATA

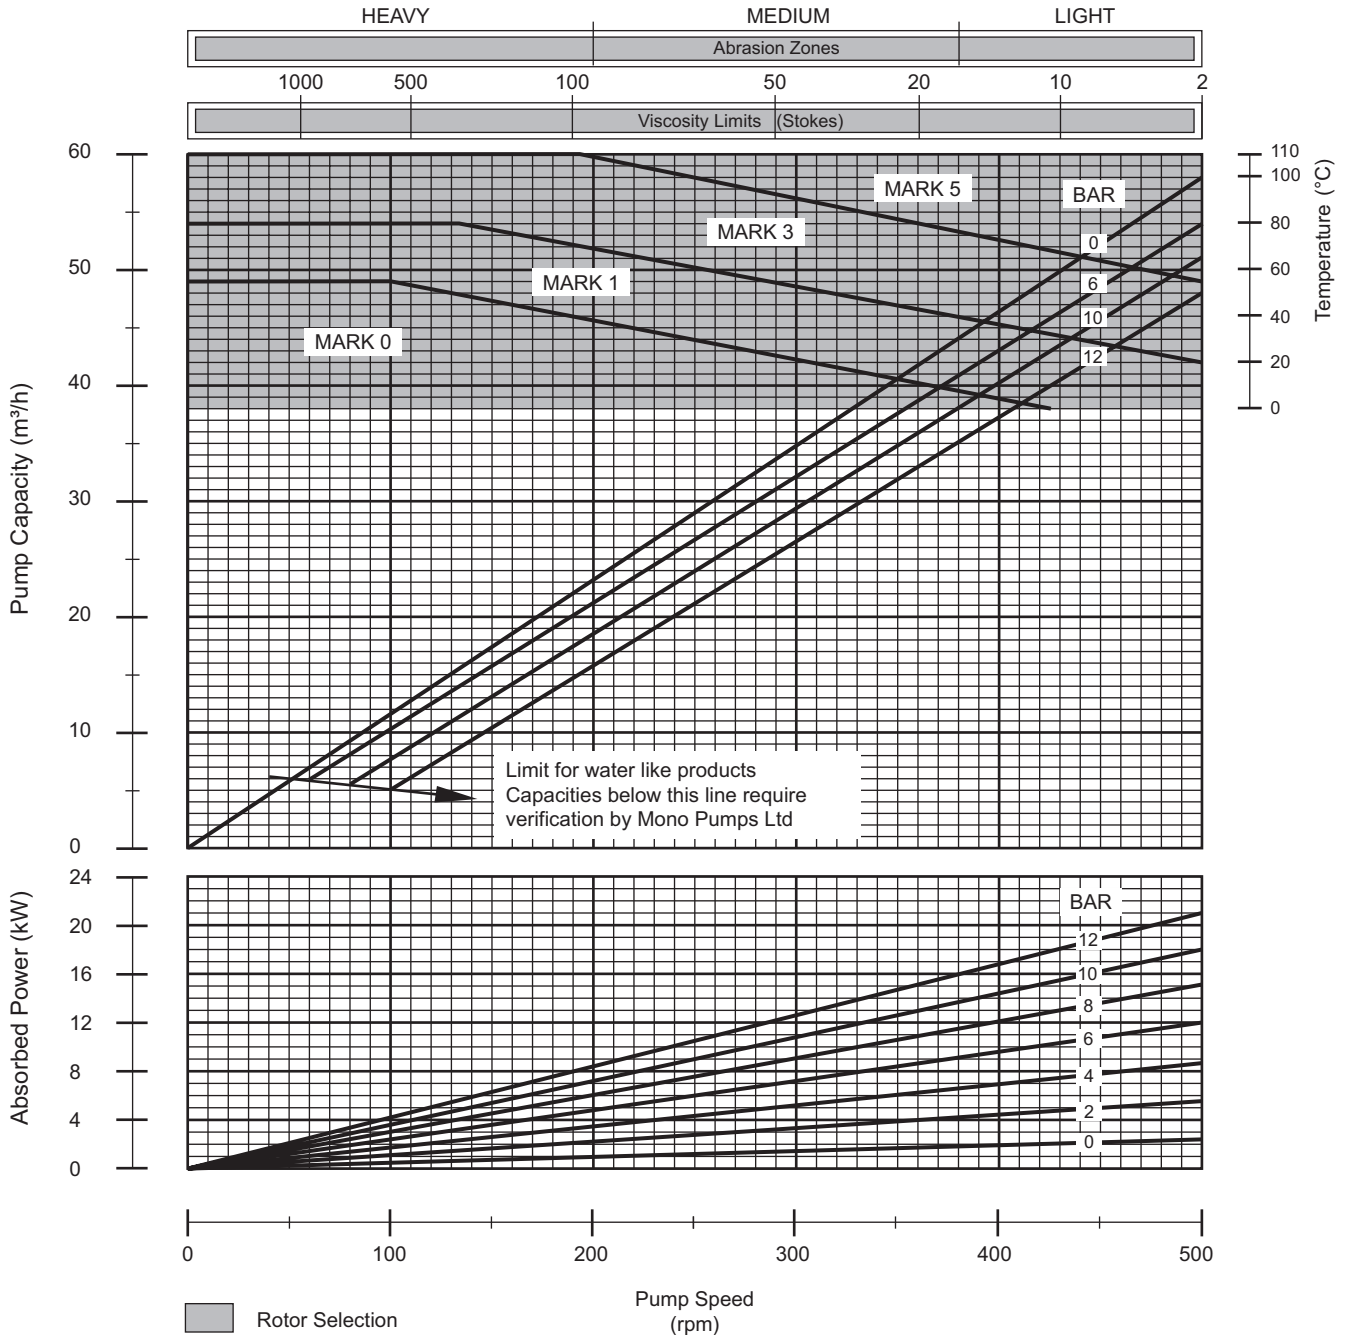

| | | | | | | |
|--------------------------|---|-----------------------|-----------------------------|--------|--------|--------|
| SLIP CORRECTION | $n = \text{corrected duty speed, } n_0 = \text{rpm @ 0 bar, } n_p = \text{rpm @ duty press.}$ $n_s = \text{Slip Speed} = n_p - n_0, f \times n_s = \text{Slip Speed Correction} = f \cdot n_s$ Slip Corrected Speed ($n = n_p - f \cdot n_s$) | | | | | |
| TEST PARAMETERS | Above data represents tests on water @ 20°C using RR and RA stator materials. | | | | | |
| FOOD APPLICATIONS | Check customer CIP process if available. Refer to Section 1 for CIP suitability | | | | | |
| | SOLIDS HANDLING (mm) | | STARTING TORQUE (Nm) | | | |
| | Hard Angular | Soft and compressible | Mark 0 | Mark 1 | Mark 3 | Mark 5 |
| EPSILON | 12 | 43 | 500 | 375 | 375 | 375 |

